

Product Name : ILLUMINATED MIRROR CABINET GALAXY 60 In X 28 In  
SKU : CGALA60283000/CGALA60286000




## FEATURES

- LED TECHNOLOGY
- HANG HORIZONTALLY
- ENERGY EFFICIENT
- SUPER BRIGHT
- DIMMABLE
- UL CERTIFIED
- DURABLE ( UP TO 120 000 HOURS )
- 5 YEARS WARRANTY
- MADE IN CANADA



# Paris Mirror

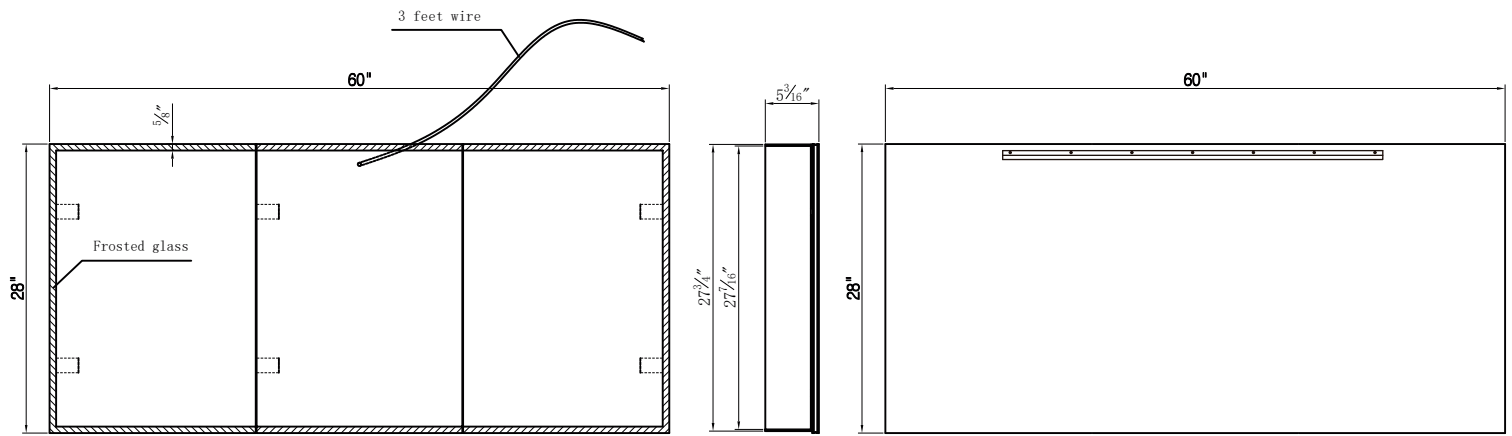

Front



Profile

Back

## ELECTRIC SPECS

- Dimensions : 60x28 in
- Weight : 100 pounds (LBS)
- IP rating: 44
- Watts: 115
- Lumens: 10800
- Input Voltage: 110V
- CRI: 90+

## INSTALLATION INSTRUCTION:

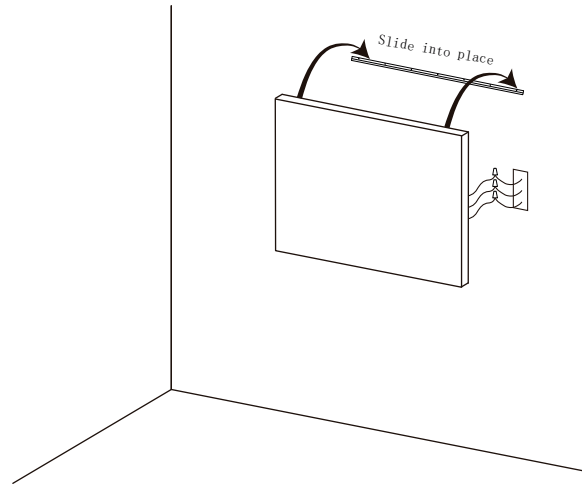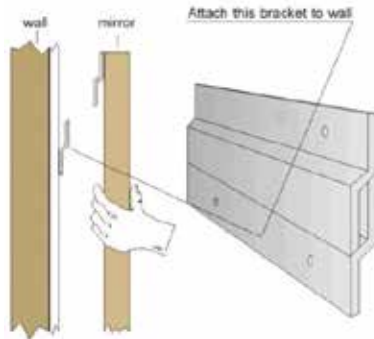

120V, Dimmable LED Driver included

- 1- Decide on wall placement.
- 2- Prepare and install Z Bar. The mirror comes with a Z Bar bracket assembly that locks together. Secure one bracket on the wall and the other bracket on the mirror.
- 3- Match & attach 3 electrical wires from mirror to home electrical wires:  
Live to Live, Ground to Ground, Neutral to Neutral.
- 4- Hang and slide into place.

## INSTALLATION & AFTER CARE INSTRUCTIONS:

### Installation:

All Paris Mirror backlit and LED mirrors have been independently tested for compliance with electrical equipment (safety) regulations. All illuminated and backlit mirrors are IP44 rated.

Illuminated mirrors have been designed and independently tested for compliance to electrical equipment (safety) regulations, and are UL Certified.

LED's have a life expectancy of 120,000 hours of continuous use. All LED light fittings are replaceable and are available through Paris Mirror customer service.

**IMPORTANT:** Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that fuse is withdrawn or circuit breaker switched off before installation begins.

Fitting in Bathrooms is subject to all regulations. It is not suitable for product installations in Saunas, Steam Rooms, or shower cubicles, and it is recommended for permanent installation.

### Care Safety:

Wear suitable eye wear protection when drilling. Use caution when using power tools near water, beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to wall before marking out fixing holes will stop drill from moving.

### Cleaning & Maintenance:

It is recommended that the unit is cleaned with a soft, dry, non-abrasive cloth when turned off. Never use cleaning agents or abrasive material on any type of surface finish.

Do not strike glass components with hard or pointed items.

Do not place very hot or cold items against or close proximity to glass surfaces.

